

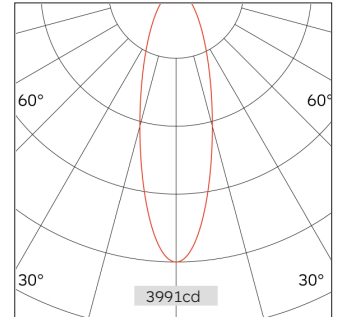


51.04515 NEK Recessed Downlight-Fixed

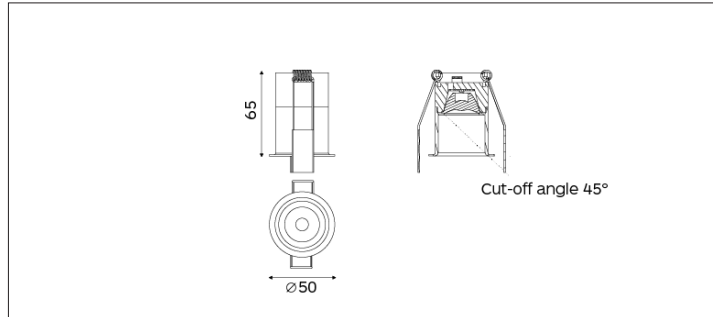

Light Distribution	NEK Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	14D/22D/36D
Cut Out	45mm
Connected Load	5W
Luminous Flux Of The Luminaire	376lm
Luminaire Efficacy	72m/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		14°
1.0	3836	0.26
2.0	959	0.51
3.0	426	0.77
4.0	240	1.03
5.0	153	1.28

Application areas: High end residential and retail projects, hotels, museums and galleries.