

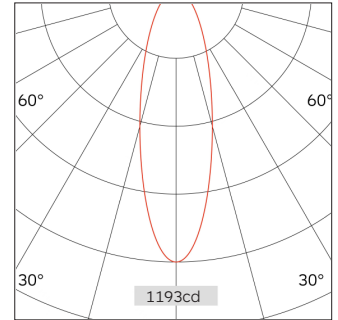


# 51.03515 NEK Recessed Downlight-Fixed

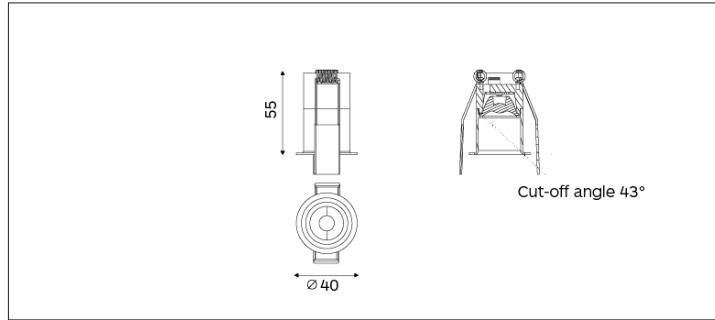

|                                |                          |
|--------------------------------|--------------------------|
| Light Distribution             | NEK Recessed Downlight   |
| Colour Temperature             | 2700/3000/3500/4000K     |
| Colour Rendition Index         | CRI 90                   |
| Optics                         | LENS                     |
| Beam Angle                     | 12D/20D/26D              |
| Cut Out                        | 35mm                     |
| Connected Load                 | 1.4W                     |
| Luminous Flux Of The Luminaire | 74lm                     |
| Luminaire Efficacy             | 53m/W                    |
| Colour Deviation               | SDCM <5                  |
| Light Source                   | LED                      |
| LED Type                       | COB                      |
| Dimming Method                 | Triac/1-10V/ Dali        |
| Cover Material                 | Aluminum                 |
| Body Material                  | Aluminum                 |
| IP Rating                      | IP20                     |
| Housing Colour                 | Sandy White/ Sandy Black |
| Weight                         | 0.2Kg                    |
| Technical Region               | 220-240V 50/60Hz         |

| Light Beam Talbe |       |      |
|------------------|-------|------|
| h(m)             | E(lx) | D(m) |
|                  |       | 20°  |
| 1.0              | 1184  | 0.22 |
| 2.0              | 296   | 0.44 |
| 3.0              | 132   | 0.66 |
| 4.0              | 74    | 0.88 |
| 5.0              | 47    | 1.10 |

Application areas: High end residential and retail projects, hotels, museums and galleries.